

Fig. 1

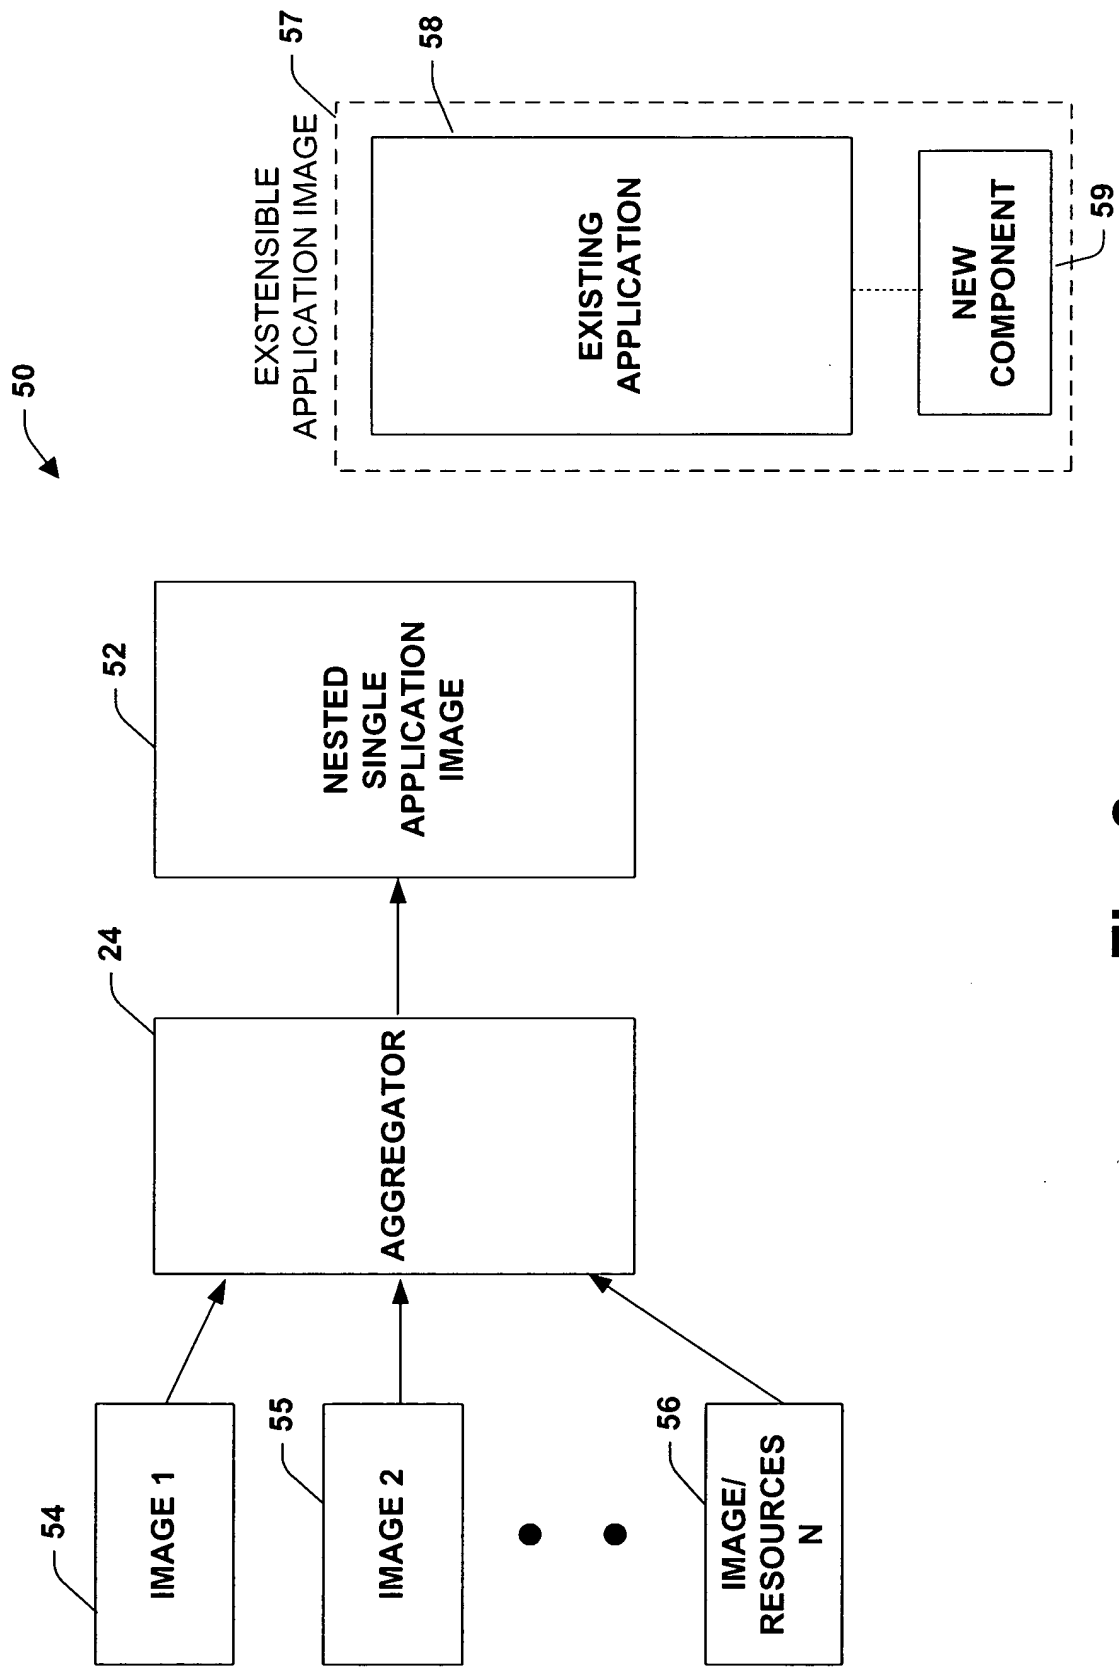


Fig. 2

SINGLE APPLICATION IMAGE

60

APPLICATION IDENTIFIER

62

MANIFEST

RESOURCE ID 1

RESOURCE ID 2

RESOURCE ID M

RESOURCE ID H1

RESOURCE ID H2

RESOURCE ID H3

RESOURCE ID H4

RESOURCE ID H5

RESOURCE ID H6


RESOURCE ID HM

64

EXECUTABLES

66

Fig. 3

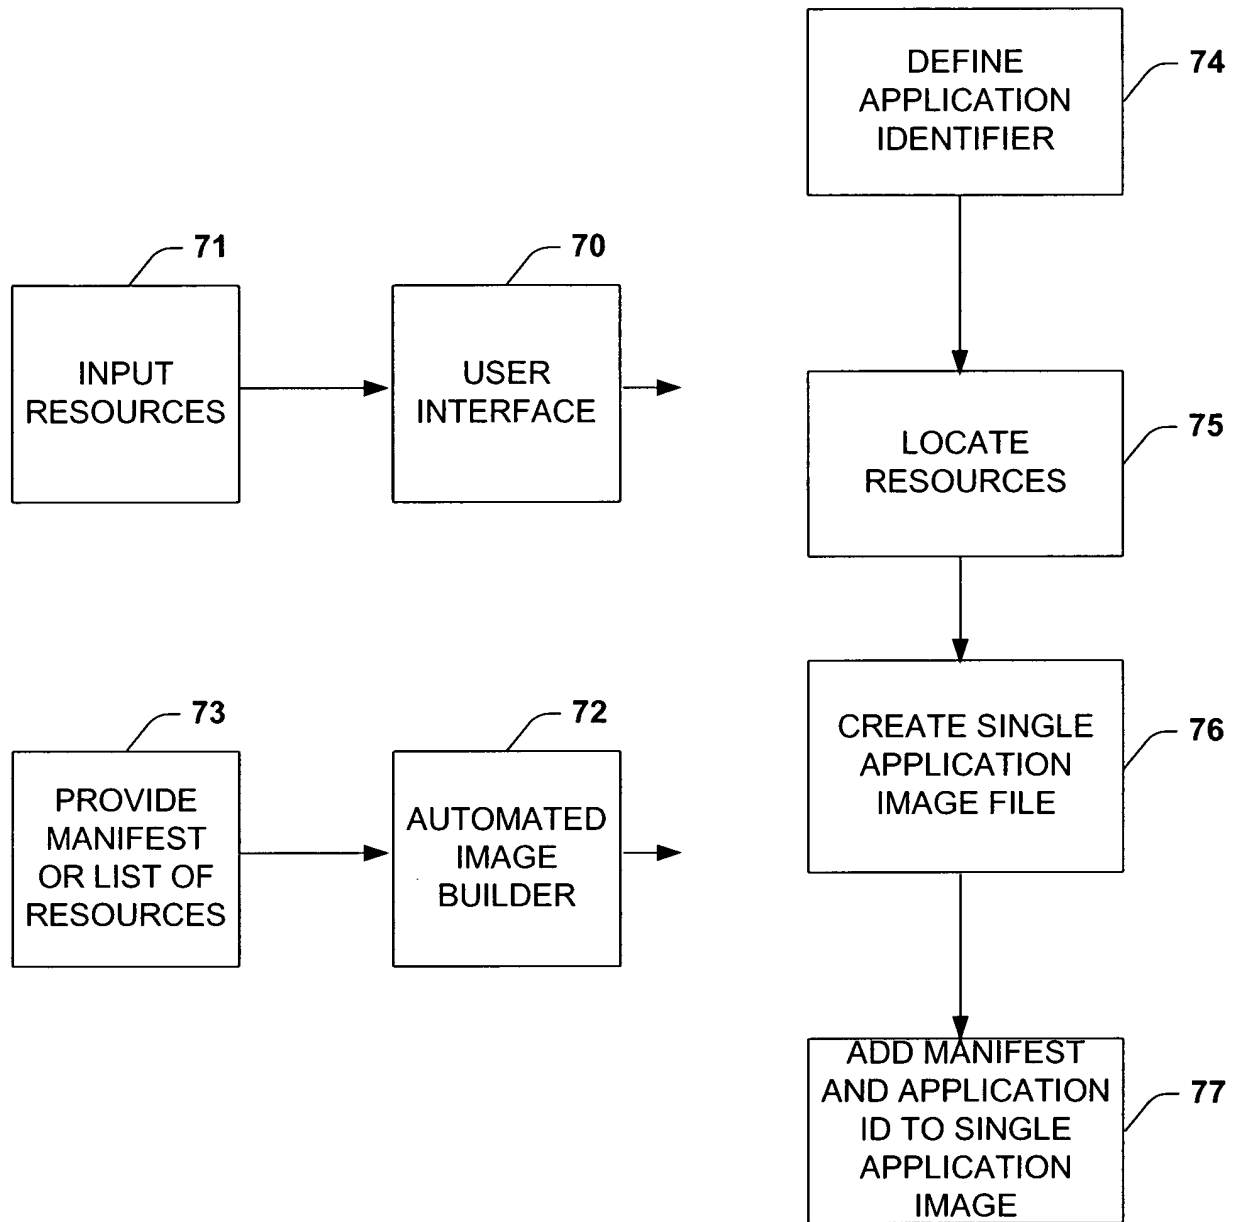

**Fig. 4**

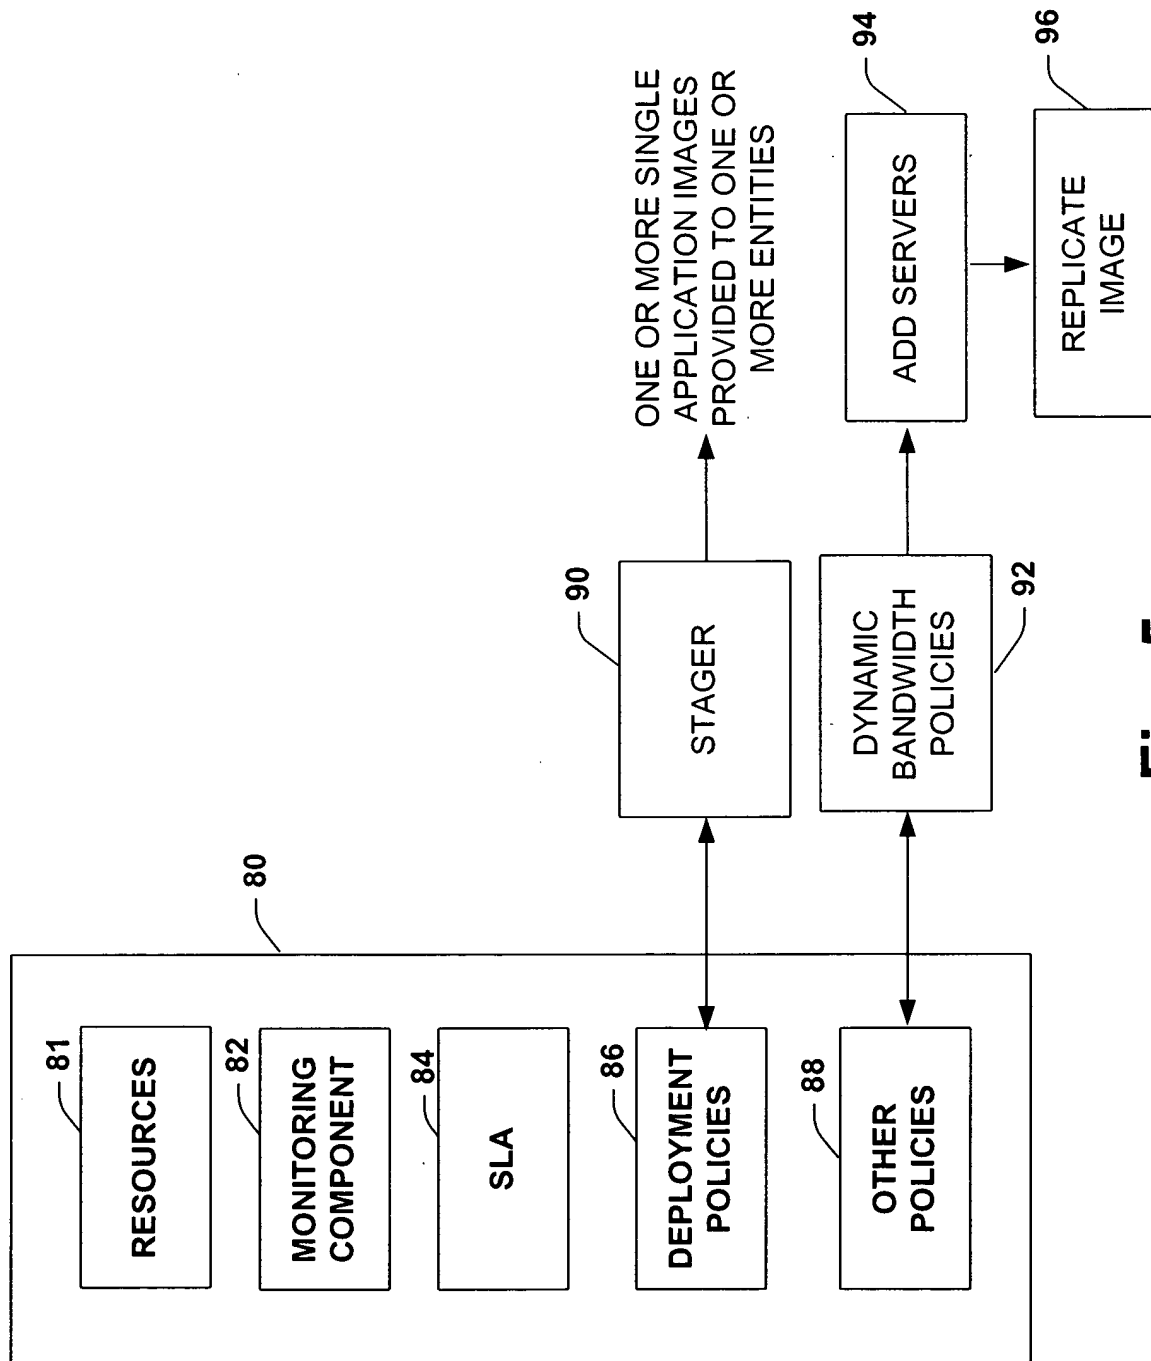


Fig. 5

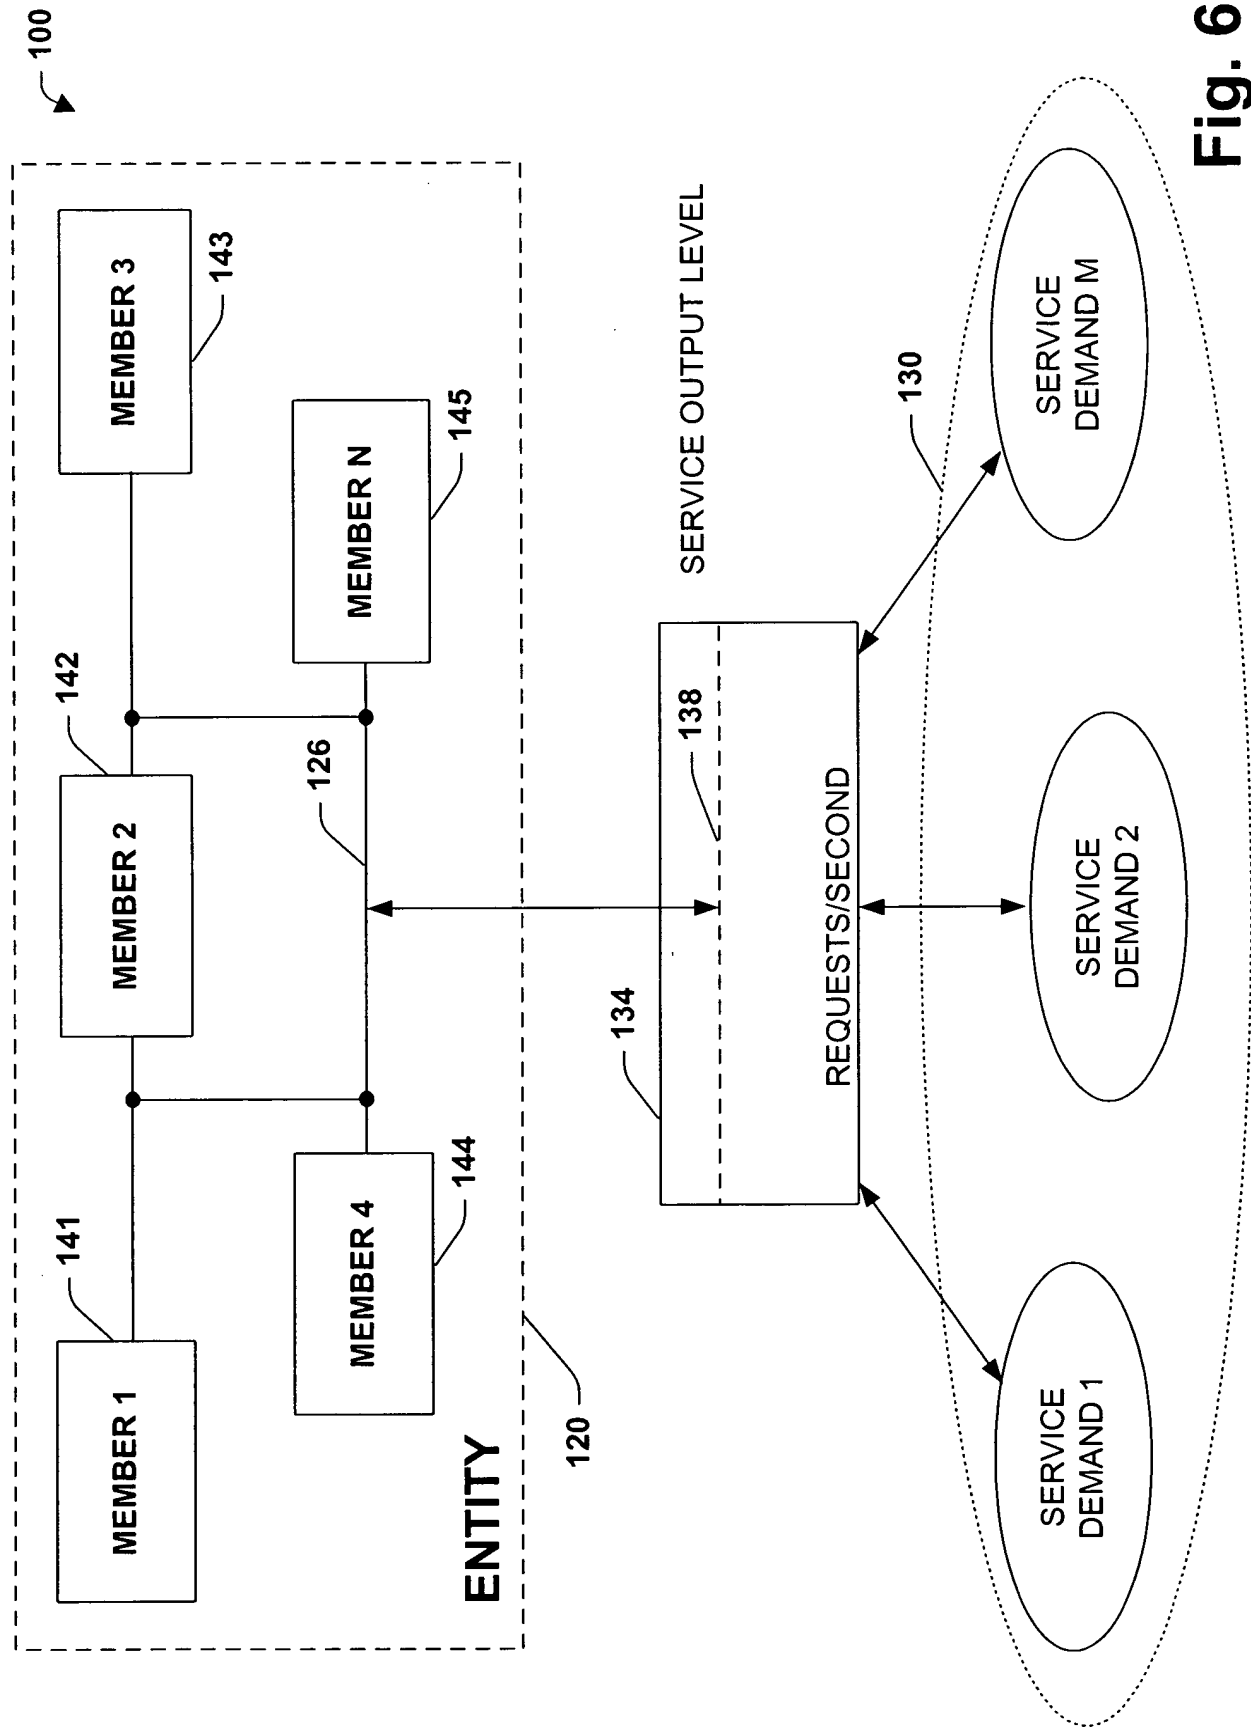


Fig. 6

# VIRTUAL APPLICATIONS ARCHITECTURE

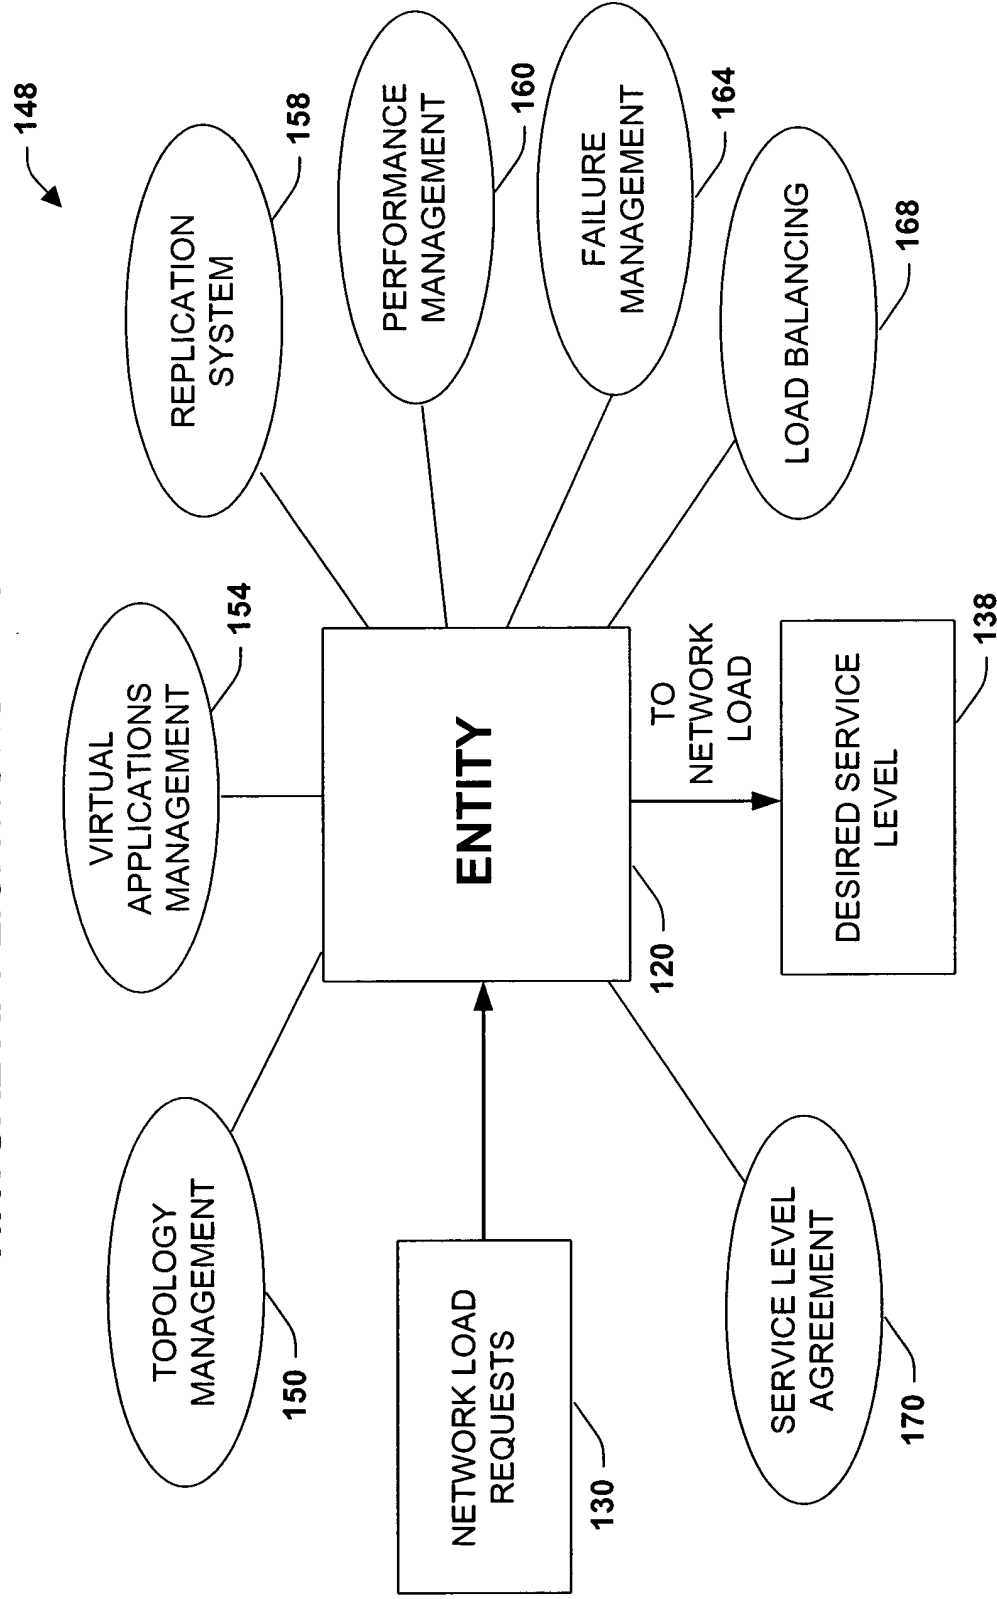


Fig. 7

200

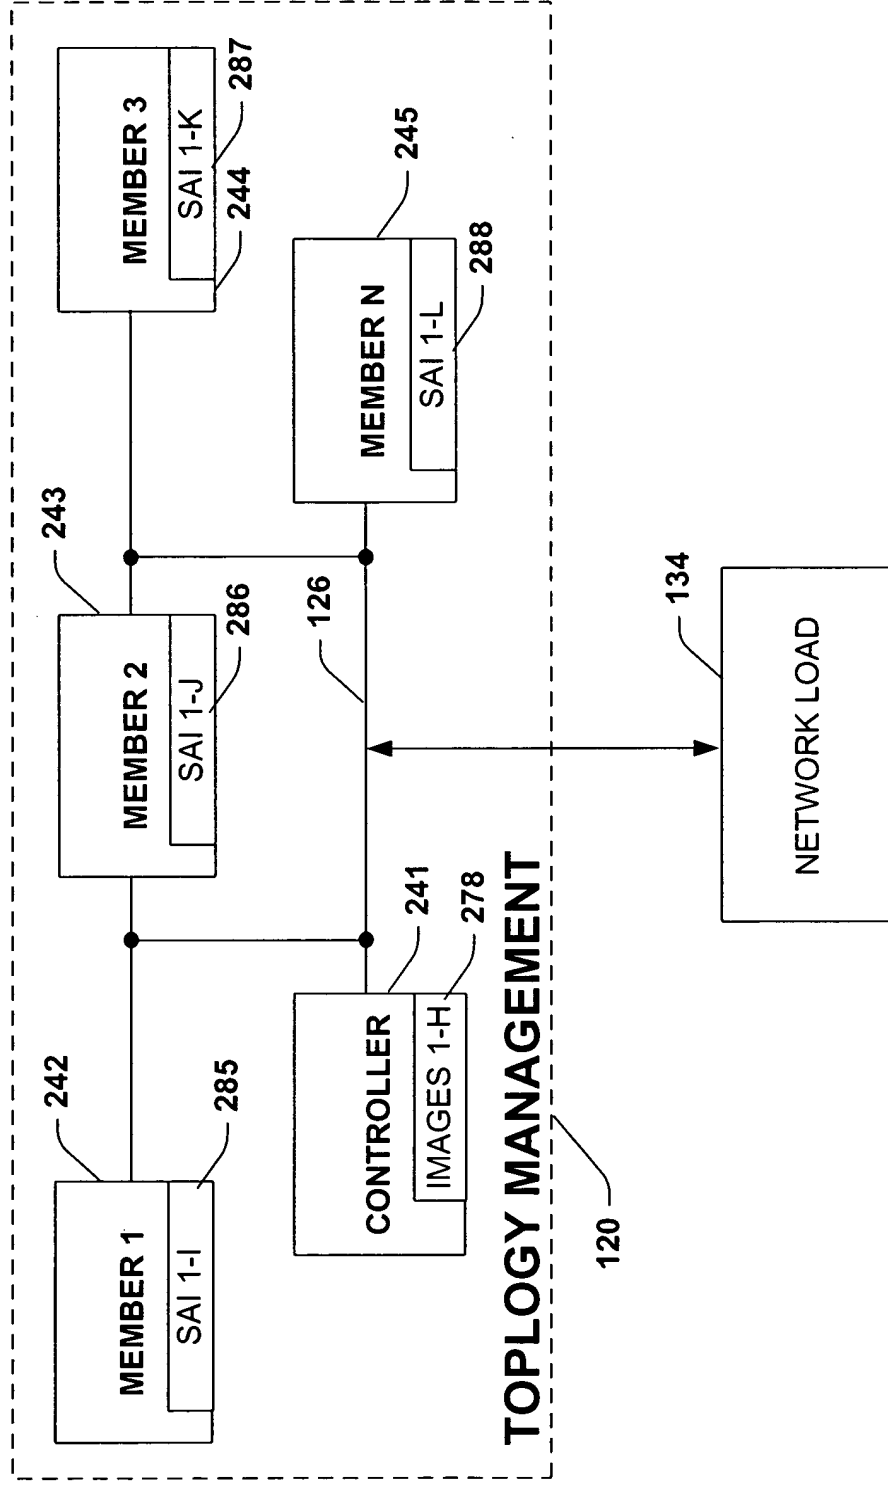


Fig. 8




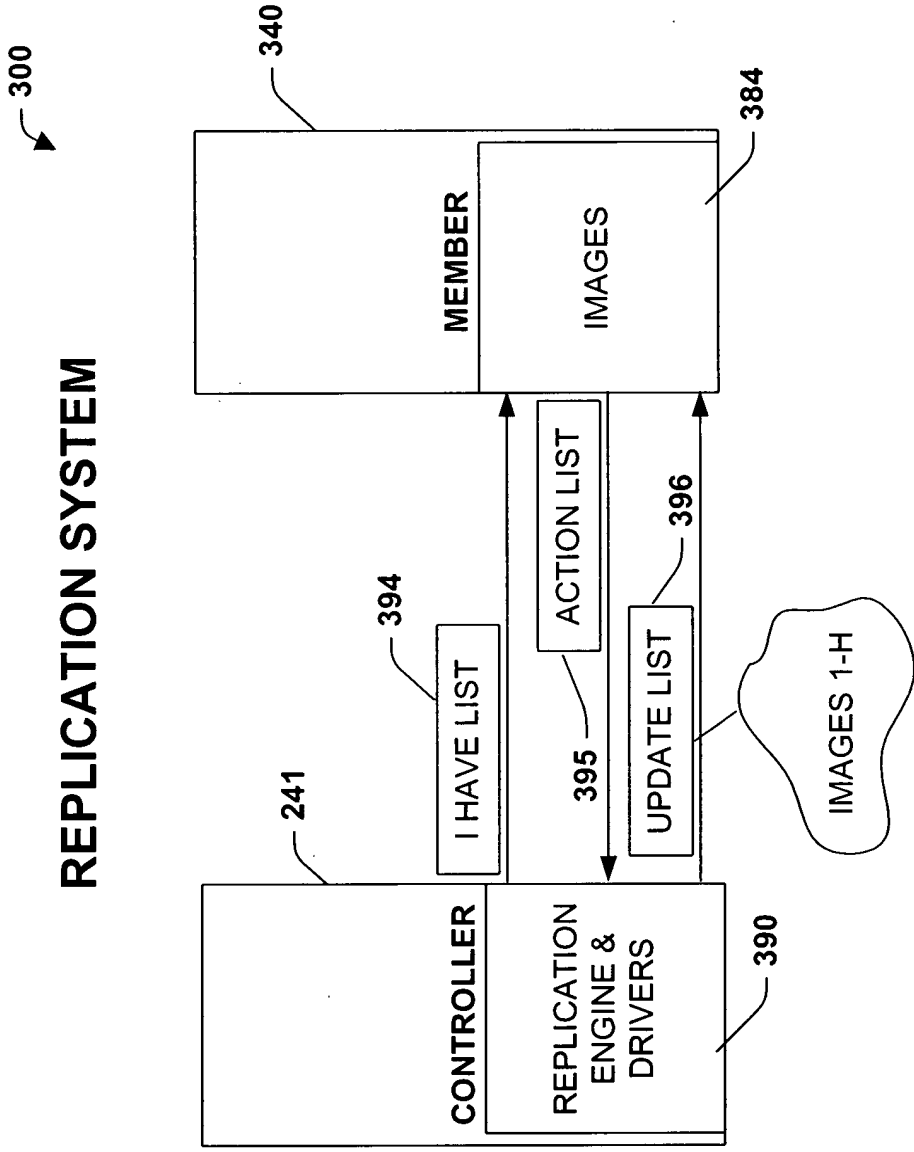


Fig. 9

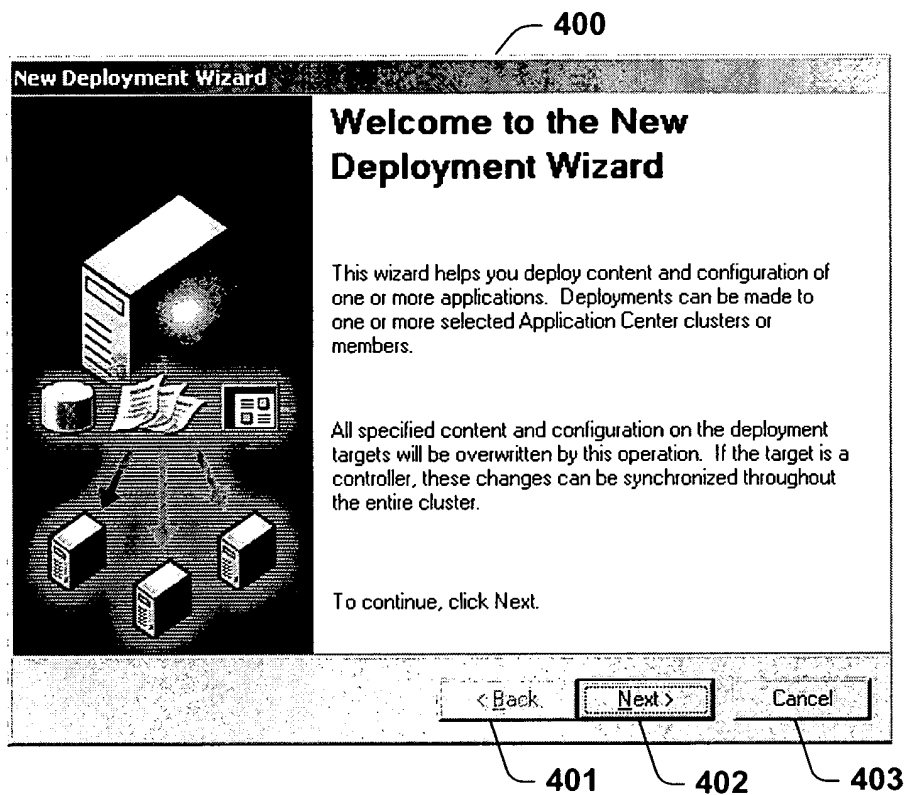

**Fig. 10**

410

#### Deployment Target Options

Enter a name for this deployment and select its type.

Source server:

Deployment name:

☒ Deploy content inside the current cluster

Deploy content to one or more cluster members within the current cluster.

☐ Deploy content outside the current cluster

Deploy content to one or more Application Center clusters or members outside the current cluster.

412

#### Deployment Source Authentication

Enter credentials with administrative privileges for the source server.

Source:

User name:

Password:

Domain:

**Fig. 11**

414

**Deployment Target Authentication**

Enter credentials with administrative privileges for all deployment targets.

This account will be used for authentication on all targets in this deployment.

User name:

Password:

Domain:

416

**Deployment Targets Within the Cluster**

Select one or more cluster members.

To deploy to the entire cluster, select the controller. To deploy to one or more members, select each member. COM+ applications and ISAPI filters must be deployed manually throughout the cluster.

Targets:

418

- ☐ Server member 1
- ☐ Server controller 3
- ☐ Server member 7

**Fig. 12**

Deployment Targets

Enter one or more deployment targets.

To deploy to an entire cluster, enter the controller name. To deploy to a specific member, enter the member name. COM+ applications and ISAPI filters must be deployed manually throughout the cluster.

Target:

Server member 1

Server controller 3

Server member 7

Browse...

Add...

Remove

Deployment Content

Select the content for this deployment.

☒ Deploy all applications and related cluster configuration

☐ Deploy one or more applications:

Accounts Payable Application

HR Tracking Application

My Web Application

Deployment Options

Select deployment options:

☒ Deploy folder and file permissions (NTFS only)

Deploying folder and file permissions will overwrite folder and file permissions on the target.

☐ Deploy COM+ applications

Deploying COM+ applications will reset Internet Information Services (IIS) and any other related services on the target.

☐ Deploy global ISAPI filters

Deploying ISAPI filters will reset Internet Information Services (IIS) on the target.

Fig. 13

#### Draining Options

Select the target draining options.

You have selected to deploy COM+ applications and/or global ISAPI filters. Deployment of these requires Internet Information Services (IIS) and other related services on the target to be reset.

Internet Information Services can be set to drain connections or can be reset immediately. Would you like to drain connections before IIS is reset?

- ☒ Yes, drain connections before resetting IIS (recommended)
- ☐ No, reset connections immediately

430


#### New Deployment Wizard

### Completing the New Deployment Wizard

You have completed the New Deployment Wizard.

Click Finish to begin the application deployment.

434

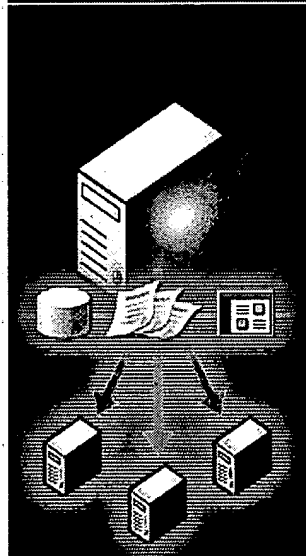


< Back

Finish

Cancel

Fig. 14

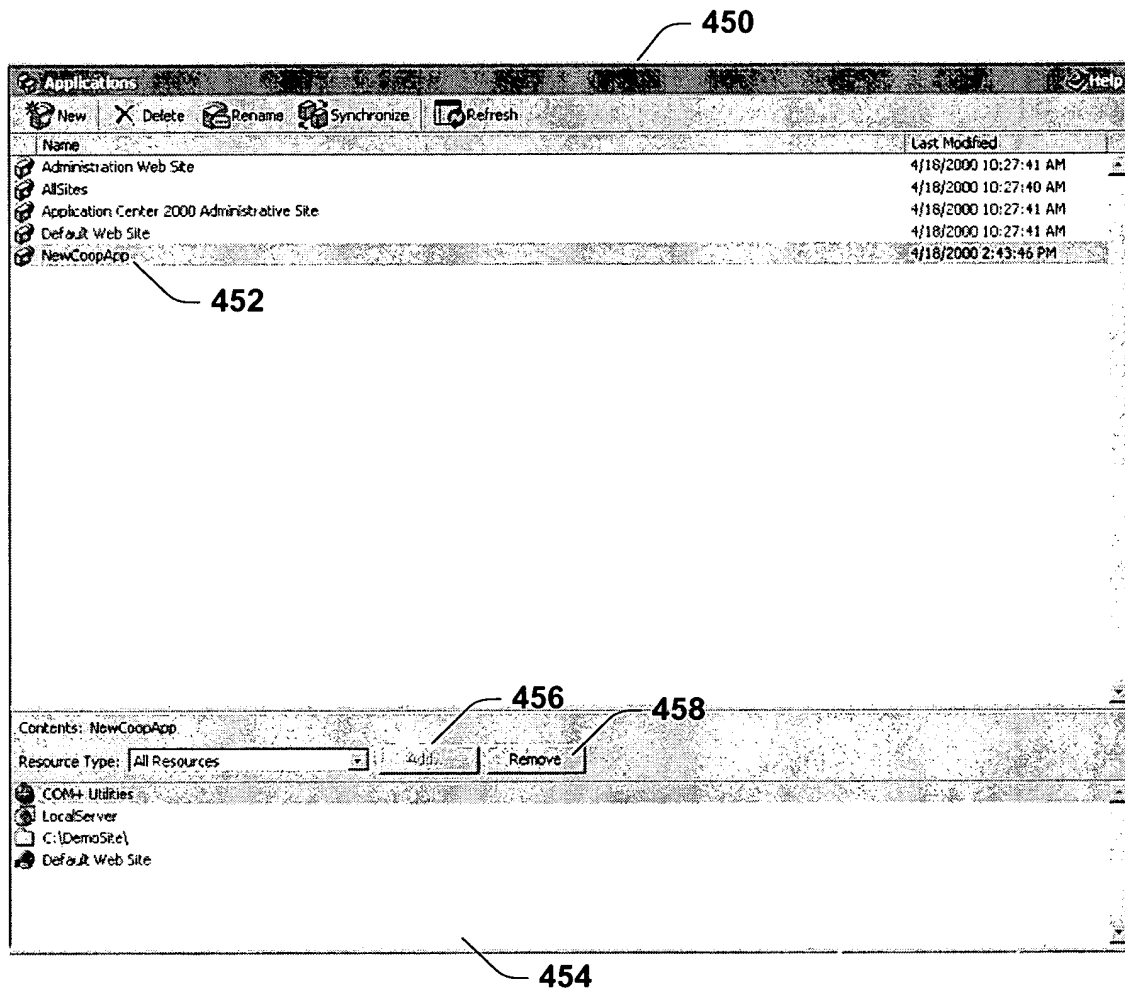

**Fig. 15**

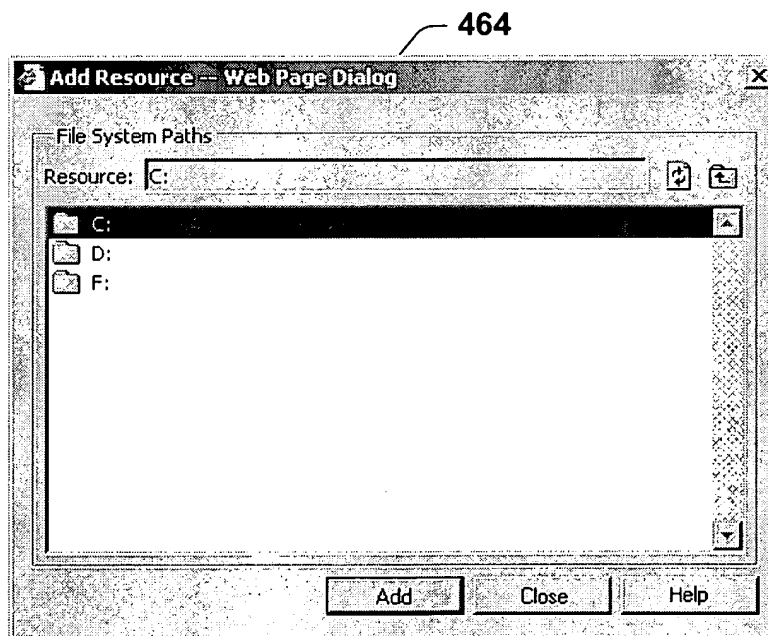
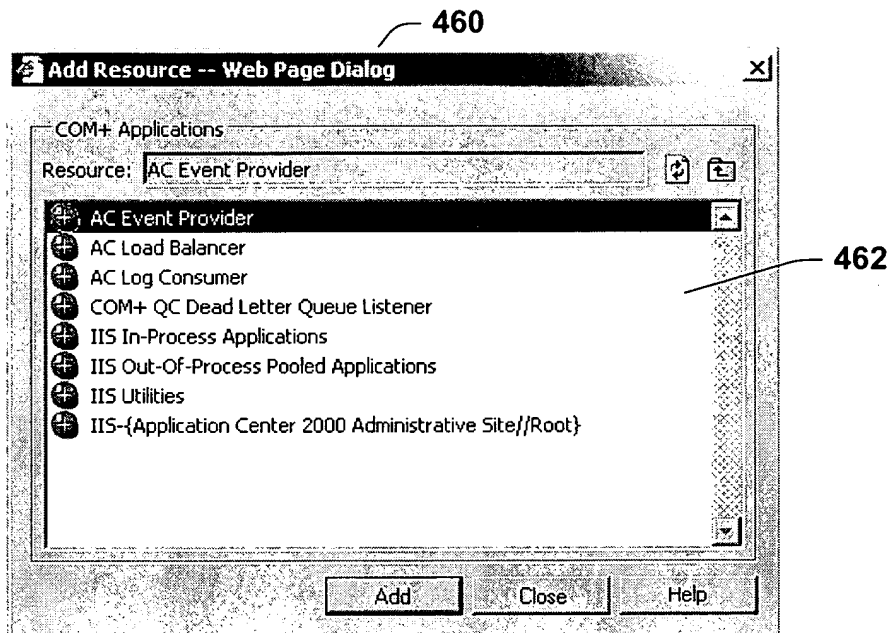


Fig. 16



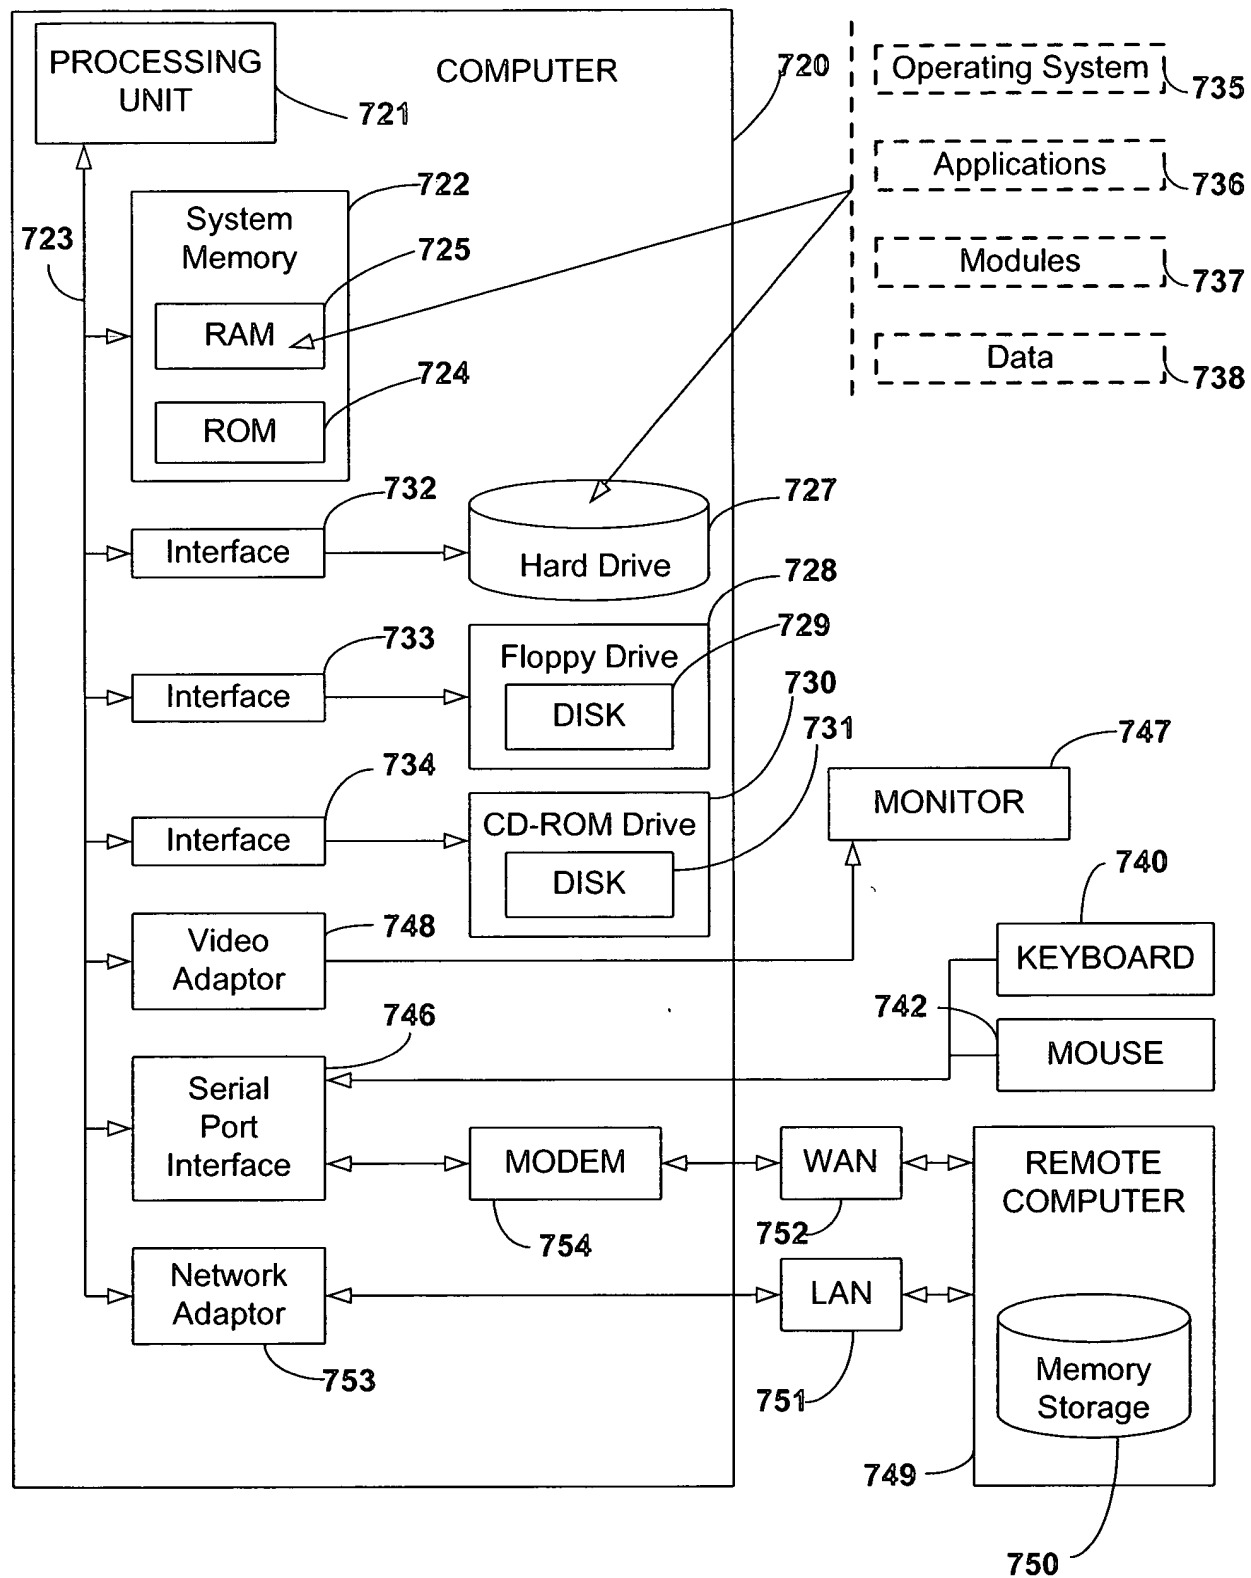


Fig. 17